


E4G 412A Wheel Alignment 4 Post Lift - 5.5 Ton, 1ph/3ph

Price: £2800 + £560 (VAT at 20%)


Total: £3360.00

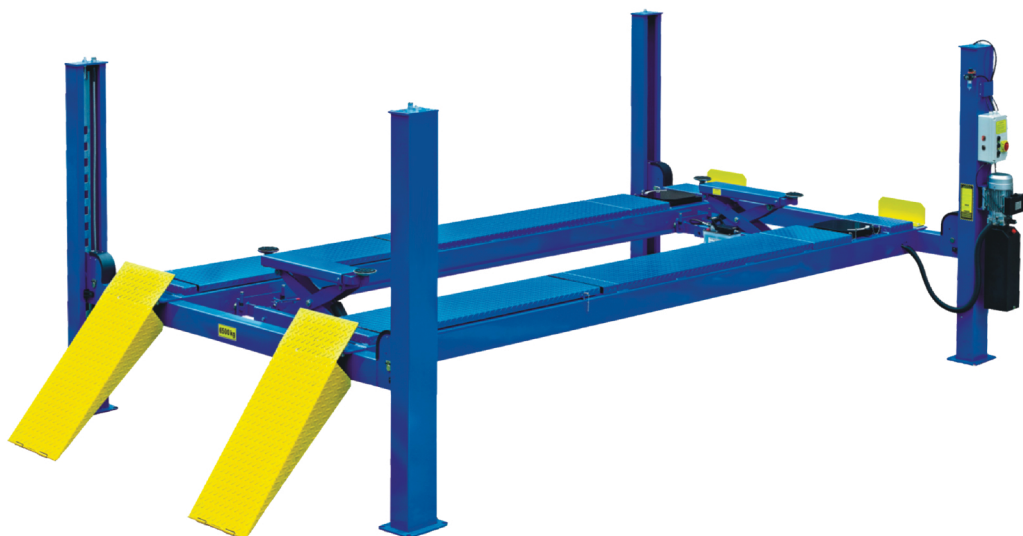

Exclusive electric control device with up, down and lock buttons. Alarm tone when lowering from 300mm to ground for extra safety.



Additional flow controlled valve to control the lowering speed for heavy-duty four post lifts.



Oil-water separator and solenoid air valve are installed outside the control box.


Specifications

Model No. **E4G 412A**

Our Peak E4G 412A, 5.5 ton wheel alignment lift is suitable for cars, vans and minibuses etc. The platforms include rear slip plates on roller bearings. The lift can be installed above or recessed into the ground for ease of access or if there is a height restriction.

Features

- 5100mm platforms, rear slip plates and turning plate section, total length 6012mm including ramps
- Electric 24 volt and air control system (air supply needed)
- Mechanical self lock and air driven safety release
- Foot protection, lift stops at 300mm and requires additional release to fully lower, alarm sounds
- Dual safety locks Primary and Secondary
- One adjustable platform to take narrow vehicles
- Adjustable safety lock ladders
- Anti-skid platform
- Rear slip plates on roller bearings
- CE approved

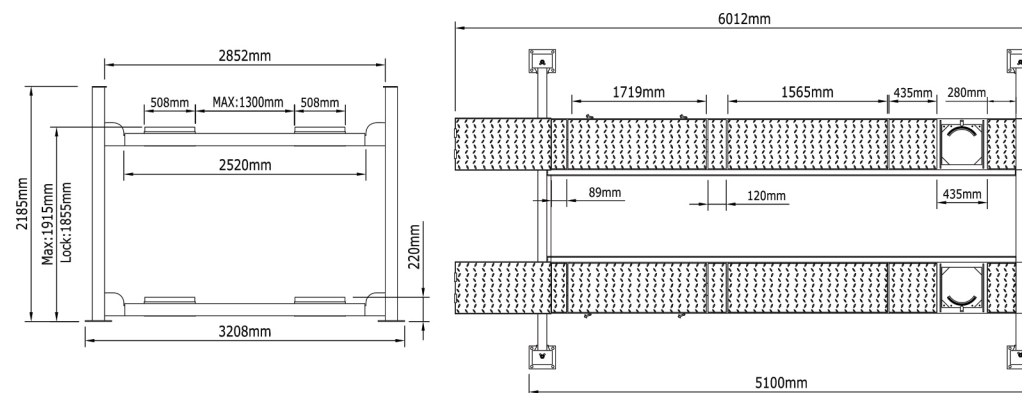

Lifting Capacity	Lifting Height	Lifting Time	Motor	Gross Weight
5.5T	1915mm	60 Seconds	4.0hp	1326kg

Overall Length (inc. ramps)	Overall Length (excl ramps)	Overall Width	Width between posts
6012mm	5100mm	3208mm	2852mm

Motor	Phase	HP	Volts	Amps *	Oil Tank
E4G 81523001	1	4	220	18 Amps	11L
E4G 81523002	3	3	380	5 Amps	11L

* The amount of current the motor can be expected to draw under full load conditions.